



3 PARTS RECTANGULAR ELECTRIC TABLE PEDESTAL ANODISED ALUMINUM


NL2388 – NL2389

2017-11-23

A. SYSTEM OVERVIEW



B. DIMENSIONS

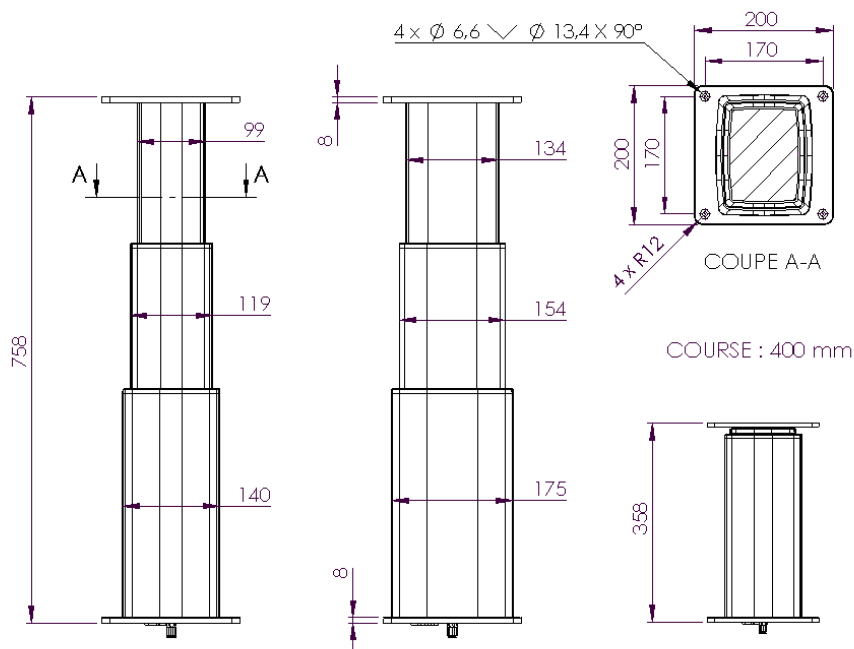

STREET
AUTOMATION

HOME
AUTOMATION

YACHT
AUTOMATION

INDUSTRIAL
AUTOMATION


C. TECHNICAL SPECIFICATIONS

- ✓ Compression stress: 2000 N
- ✓ Safety factor: > 2,5
- ✓ Dynamic bending moment: 250 Nm
- ✓ Static bending moment: 500 Nm
- ✓ Stroke: 400 mm
- ✓ Minimum height: 358 mm
- ✓ Maximum height: 758 mm
- ✓ Speed (not loaded): 18 mm/s
- ✓ Speed (at max load): 9 mm/s
- ✓ Electric powering:
 - 24V DC (ref. NOVAL NL2389) => Max Amps consumption: 5 A
 - 12V DC (ref. NOVAL NL2388) => Max Amps consumption: 10 A
- ✓ Weight: 12kg
- ✓ Noise level: 50dB

D. ELECTRIC ARCHITECTURE


Pedestal wiring when not synchronized:

Please wire the pedestal with a MOM OFF MOM switch in order to get a polarity inversion (as shown in the sketch)

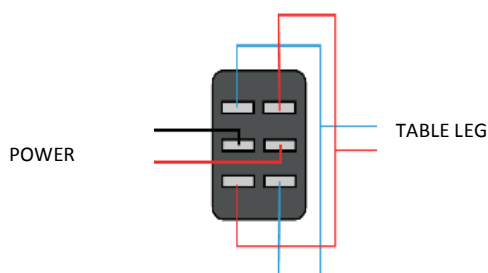

Pedestal wiring when synchronized with another one:

Table pedestals can be synchronized, 2 by 2, using the synchronization control box ref NL2410 (synchro box dimensions: 180 x 94 x 57mm).

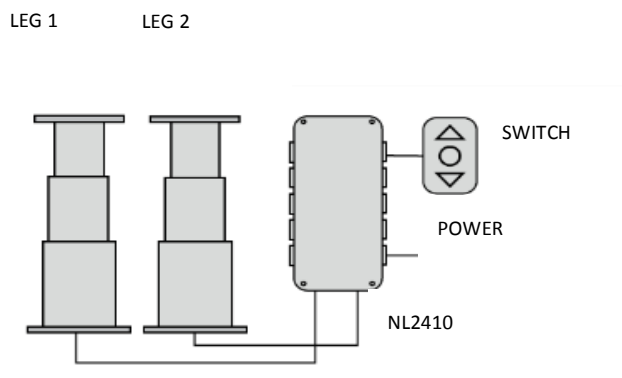

NOVAL

23 VOIE HEMERA
ZI LAVIGNE
31190 AUTERIVE, FRANCE

Tél. : +33 (0)5 34 47 00 09

Fax : +33 (0)5 34 47 71 87

info@noval-france.com

www.noval-france.com