

Sikaflex[®]-292i

Assembly adhesive for marine application

Technical Product Data

Chemical base	1-C polyurethane
Colour (CQP ¹ 001-1)	White, RAL 1005
Cure mechanism	Moisture-curing
Density (uncured) (CQP 006-4)	1.3 kg/l approx.
Non-sag properties (CQP 061-1)	Very good
Application temperature ²	10°C to 40°C
Tack-free time ³ (CQP 019-1)	40 min approx.
Open time (CQP 526-1)	30 min approx.
Curing speed (CQP 049-1)	(see diagram 1)
Shrinkage (CQP 014-1)	2% approx.
Shore A hardness (CQP 023-1 / ISO 868)	50 approx.
Tensile strength (CQP 036-1 / ISO 37)	3 MPa approx.
Elongation at break (CQP 036-1 / ISO 37)	300% approx.
Tear propagation resistance (CQP 045-1 / ISO 34)	8 N/mm approx.
Tensile lap-shear strength (CQP 046-1 / ISO 4587)	2.0 MPa approx.
Glass transition temperature (CQP 509-1 / ISO 4663)	-40°C approx.
Electrical resistance (CQP 079-2 / ASTM D 257-99)	5 x 10 ⁹ Ω · cm approx.
Service temperature (CQP 513-1)	-40°C to +90°C
Short term	4 hours +120°C 1 hour +140°C
Shelf life (storage below 25°C) (CQP016-1)	12 months

¹⁾ CQP= Corporate Quality Procedure ²⁾ climate, substrate, product ³⁾ 23°C / 50% r.h.

Description


Sikaflex[®]-292i is a non-sag 1-C polyurethane adhesive of thixotropic, paste-like consistency which cures on exposure to atmospheric moisture to form a durable elastomer. Sikaflex[®]-292i exhibits excellent adhesive properties and a high degree of mechanical strength. Sikaflex[®]-292i meets the low spread of flame requirements set out by the International Maritime Organisation (IMO). Sikaflex[®]-292i is manufactured in accordance with the ISO 9001 quality assurance system.

Product Benefits

- Wheelmark approved
- 1-C formulation
- Elastic
- Can be over painted
- Good gap-filling properties
- Capable of withstanding high dynamic stresses
- Vibration-damping
- Non corrosive
- Electrically non conductive
- Bonds well to a wide variety of substrates

Areas of Application

Sikaflex[®]-292i is suitable for structural joints in marine constructions which will be subjected to high dynamic stresses. Suitable to bond metals, particularly aluminum (including anodized finishes), metal primers and paint coatings (2-C systems), or ceramic materials, plastics such as GRP (unsaturated polyester resin), ABS, etc. Clear plastics and mineral glass should not be bonded with Sikaflex[®]-292i. This product is suitable for experienced professional users only. Test with actual substrates and conditions have to be performed to ensure adhesion and material compatibility.



Cure Mechanism

Sikaflex®-292i cures by reaction with atmospheric moisture. At low temperature the water content of the air is generally lower and the curing reaction proceeds slower (see diagram 1).

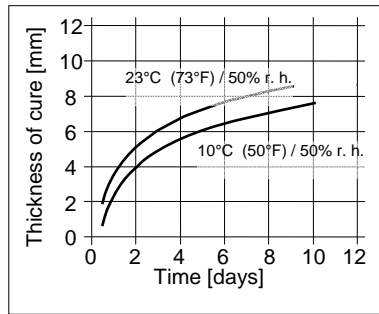


Diagram 1: Curing speed for Sikaflex®-292i

Chemical Resistance

Sikaflex®-292i is resistant to fresh water, seawater, limewater, sewage effluent, dilute acids and caustic solutions; temporarily resistant to fuels, mineral oils, vegetable and animal fats and oils; not resistant to organic acids, alcohol, concentrated mineral acids and caustic solutions or solvents.

The above information is offered for general guidance only. Advice on specific applications will be given on request.

Method of Application

Surface preparation

Surfaces must be clean, dry and free from all traces of grease, oil and dust. The surfaces must be prepared in accordance with the instructions given in the current edition of the Sika® Pre-Treatment Chart for Marine Applications.


Advice on specific applications is available from the Technical Service Department of Sika Industry.

Application

Cut off the tip of the nozzle. Ensuring uniform thickness of adhesive when compressed, we recommend to apply the adhesive in the form of a triangular bead (see illustration).

Do not apply at temperatures below +10°C or above +40°C. The optimum temperature for substrate and adhesive is between +15°C and +25°C. For cartridge application we recommend the use of a

compressed air piston type cartridge gun.

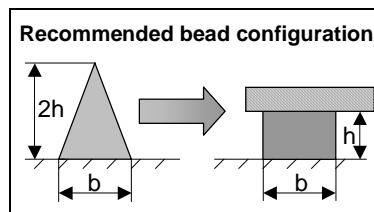

Tooling and finishing must be carried out within the tack-free time of the adhesive. We recommend the use of Sika® Tooling Agent N. Other finishing agents or lubricants must be tested for suitability/compatibility.

Removal

Uncured Sikaflex®-292i can be removed from tools and equipment with Sika® Remover-208 or another suitable solvent. Once cured, the material can only be removed mechanically.

Hands and exposed skin should be washed immediately using Sika® Handclean Towel or a suitable industrial hand cleanser and water. Do not use solvents!

Overpaintability

Sikaflex®-292i can be overpainted with most conventional paint systems. The paint must be tested for compatibility by carrying out preliminary trials and the best results are obtained if the sealant is allowed to cure fully first, especially in the case of baked enamels. Please note that nonflexible paint systems may impair the elasticity of the adhesive, impair joint movement and lead to cracking of the paint film.

PVC based paints and paints that dry by oxidation (oil or alkyd resin based) are generally not suitable to overpaint Sikaflex®-292i. Two pack paint systems are preferred.

Further Information

Copies of the following publications are available on request:

- Material Safety Data Sheets
- Sika Pre-Treatment Chart for Marine Applications
- General Guidelines Bonding and Sealing with Sikaflex®

Packaging Information

Cartridge	300 ml
Unipack	600 ml

Value Bases

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

Health and Safety Information

For information and advice regarding transportation, handling, storage and disposal of chemical products, users shall refer to the actual Material Safety Data Sheets containing physical, ecological, toxicological and other safety-related data.

Legal Notes

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Further information available at:
www.sika.com
www.sika.it

Sika Italia S.p.A.
Business Unit Industry
Via Luigi Einaudi 6
20068 Peschiera Borromeo (MI) - Italia
e-mail: industry@it.sika.com
Tel. 0039 02 54778 111
Fax 0039 02 54778 409

COMPANY WITH QUALITY MANAGEMENT
SYSTEM CERTIFIED BY DNV
= ISO 9001:2008 =

