

CP6

WATERPROOF STEREO





KEY FEATURES

Bluetooth Bluetooth Audio Easily stream your favorite tunes from your smartphone with Bluetooth Audio support. View track info including a song's name, artist, and album information right on the display.

DAB+ Ready Access hundreds of stations with DAB+ Digital Radio Receiver (sold separately).

288W Amplifier Keep your system going with a 288W amplifier that powers up to 8 speakers or a combination of speakers and subwoofers.

Multi-Environment Protection Install anywhere with waterproof (rated IP65), UV, and salt/fog resistant protection enabling reliable performance in the toughest environmental conditions.

DSP EQ Allows common EQ settings to be applied to enhance music content, such as Pop, Classical and Rock or manually adjust bass and treble for a tailored sonic experience.

Variable Brightness Adjust the display brightness from 100% for normal operation to 30% brightness to reduce screen glare during night time operation.



Compact Design Perfect for installations with limited dash or panel space while still packed with all the power and functionality expected from Aquatic AV.

USB Play USB thumb drives with supported audio media and charge USB devices such as smartphones with USB charging.

AM/FM Radio Listen to your favorite AM and FM radio stations. Save your favorite stations with 18 FM and 12 AM presets available. Compatible with both US and European frequencies.

12V Triggers Control up to two external devices, such as amplifiers, deck, or spot lighting directly from the stereo or remote control. Output 12V DC, 3A max.


Remote Ready Connect wired and wireless remote controls for an easier listening experience with the ability to control your CP6's features and view track info on the remote display wherever you want.

2 YEAR 2 Year Warranty Aquatic AV products are built to be reliable and durable. The CP6 comes with a two year warranty that can be extended with product registration.

CP6 DATASHEET



| SPECIFICATIONS | |
|----------------------|--|
| Supported Media: | Bluetooth Audio / USB / DAB+ / MP3 / AM / FM / Aux |
| Device Charging: | via rear USB (2.1A) |
| Display: | Monochrome TFT with blue backlight |
| Display Brightness: | Variable - 100% or 30% settings |
| Inputs: | Bluetooth, 1x USB, 1x stereo pair RCA |
| Outputs: | 1x stereo pair RCA Pre-out (2V) |
| DAB+ Ready: | 18x preset memory. Requires AQ-DAB+ Radio Receiver (sold separately) |
| AM/FM Tuner: | 18x FM pre-set & 12x AM pre-set memory. US/Euro frequencies |
| Power (max): | 4x 45W (4 Ohms), 4x 72W (2 Ohms) |
| Amplifier Type: | Class A/B (2 Ohm stable) |
| Output Voltage: | 10.5V - 14.4V DC |
| Current Draw: | 10A (max) / <3mA (standby) |
| Waterproof: | Yes - IP65 |
| UV Protection: | 500hrs stable |
| Salt/Fog Protection: | 500hrs stable |
| Certifications: | CE, RoHS, WEE, FCC |
| Fascia Material: | ABS |
| Chassis Material: | Aluminum |
| Accessories: | Silicon Faceplate Cover (included) |
| | WR6 Wired Remote Control (sold separately) |
| | AQ-RF-6UBT Handheld Remote Control (sold separately) |
| | AQ-DAB+ Digital Radio Receiver (sold separately) |
| Additional Features: | Clock display |
| | 2x External Triggers (12V DC, 3A) |
| | DSP EQ, Bass/Treble, Balance/Fader, Loudness |
| | Stainless Steel mounting hardware |

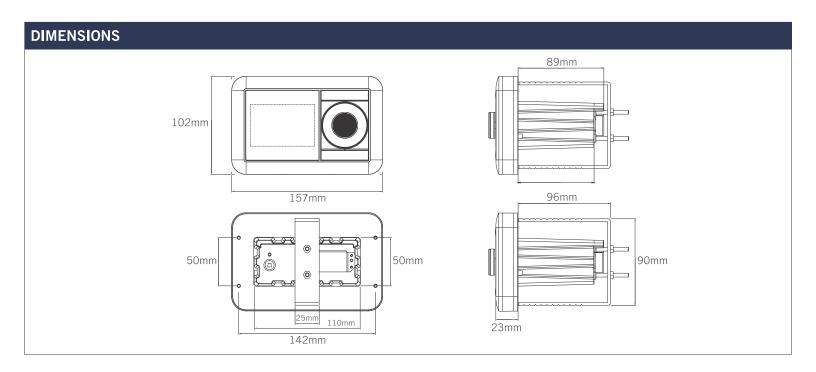

Design and specification subject to change without notice.E&OE